

(1) CERTIFICATE

- (2) No. of the Certificate: **ZP/B031/25-PZ**
- (3) Product: **Anchor device type A
Type: ABS-Lock® Falz H**
- (4) Manufacturer: **ABS Safety GmbH**
- (5) Address: **Gewerbering 3, 47623 Kevelaer, Germany**
- (6) The design of this product and any acceptable variation thereto are specified in the appendix to this certificate.
- (7) The Certification Body of DEKRA Testing and Certification GmbH certifies that this product complies with the requirements of the test regulations listed under item 8 below. The test results are recorded in report PB 25-035.
- (8) The requirements are assured by compliance with
DIN EN 795:2012 **DIN CEN/TS 16415:2017**
- (9) This certificate relates only to the design and tests of the specified product in accordance to the contemplated requirements. Further requirements applied to the manufacturing process and supply of this product, are not covered by this certificate.
- (10) The manufacturer is authorised to apply the mark of conformity to the products that conform to the types examined.
- (11) This certificate is valid until 2030-03-06.



DEKRA Testing and Certification GmbH
Bochum, 2025-03-07

Signed: Brumm
Managing director

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.

A handwritten signature in blue ink, appearing to read 'Q. Brumm', written over a horizontal line.

Managing director

TRANSLATION

- (12) Appendix to
- (13) **Certificate**
ZP/B031/25-PZ
- (14) 14.1 Subject and type
Anchor device type A
Type: ABS-Lock® Falz H

14.2 Description

The anchor device, type: ABS-Lock® Falz H (Fig. 1) serves to protect a maximum of three persons against fall from a height. The installation is carried out on wooden substrates with sufficient strength.

The round base body (Ø 258,5 mm) has all-round 15 holes (Ø 6,5 mm) to accommodate the fastening elements and a central hole (Ø 16,2 mm) to accommodate the eyelet. The eyelet is a folded, rotatable plate (t = 3 mm) with two recesses. One recess (Ø 16,2 mm) is to take the M 16 hexagon screw and to connect the eyelet to the base body, the other recess (Ø 30 mm) serves as attachment point for the user's personal protective equipment against fall from a height.

The anchor device is made of corrosion-resistant material and is intended for a load parallel to the surface.

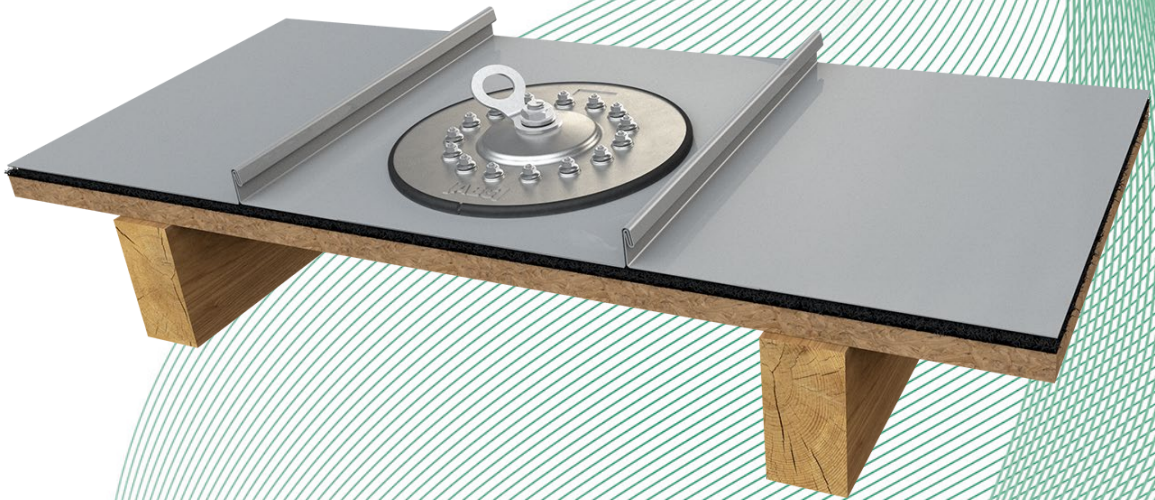


Fig. 1: Anchor device, type: ABS-Lock® Falz H

- (15) Report

PB 25-035 dd. 2025-03-07