

(1) EU-Type Examination Certificate


according to Module B Paragraph 6.1 of PPE Regulation (EU) 2016/425

- (2) Regulation of the European Parliament and of the Council of 9 March 2016 relating to personal protective equipment (PPE) - Regulation (EU) 2016/425
- (3) No. of EU-Type Examination Certificate: **ZP/B069/25** replaces ZP/B122/20
- (4) Product: **Anchor device type B**
Type: ABS-Lock® T and ABS-Lock® T-Max
- (5) Manufacturer: **ABS Safety GmbH**
- (6) Address: **Gewerbering 3, 47623 Kevelaer, Germany**
- (7) Risk category: **III**
- (8) The design and construction of this personal protective equipment and any acceptable variation thereto are specified in the appendix to this EU type-examination certificate.
- (9) The certification body of DEKRA Testing and Certification GmbH, Notified Body No. 0158 according to Chapter V of Regulation (EU) 2016/425 of 9 March 2016, certifies that this personal protective equipment has been found to comply with the essential Health and Safety Requirements given in Annex II to the Regulation. The evaluation results are recorded in report PB 25-090. Other possibly applicable Union legislations applicable to the specified personal protective equipment have not been taken into account in this EU-type examination certificate.
- (10) The essential Health and Safety Requirements are assured in consideration of
DIN EN 795:2012 **DIN CEN/TS 16415:2017**
- (11) This EU type-examination certificate relates only to the design, examination and tests of the specified personal protective equipment in accordance to Regulation (EU) 2016/425. For category III personal protective equipment, this EU type-examination certificate may only be used in conjunction with one of the conformity assessment procedures referred to Article 19 (c).
- (12) When applying the CE Marking according to Article 16 and 17 of Regulation (EU) 2016/425 to the products that conform to the types examined, the client is obliged to add, in accordance with the attached pattern, the identification number of the Notified Body engaged in the conformity assessment according to Module C2 or D. Furthermore, the manufacturer is obliged to issue an EU declaration of conformity in accordance with Article 15 of Regulation (EU) 2016/425 and to enclose it with the personal protective equipment, or to indicate the Internet address in the manual and in the instructions in Annex II, point 1.4., at which the EU declaration of conformity can be accessed.
- (13) This EU-Type Examination Certificate is valid until 2030-05-27

DEKRA Testing and Certification GmbH
Bochum, 2025-05-28

Signed: Brumm
Managing director

We confirm the correctness of the translation from the German original. In the case of arbitration only the German wording shall be valid and binding.


Managing director

TRANSLATION

- (14) Appendix to
- (15) **EU-Type Examination Certificate**
ZP/B069/25
- (16) 16.1 Subject and type
Anchor device type B
Type: ABS-Lock® T and ABS-Lock® T-Max

16.2 Description

The anchor devices, type: ABS-Lock® T (Fig. 1) and ABS-Lock® T-Max (Fig. 2) are used as temporary single anchorage points to secure a maximum of 3 persons against falling. The products are designed for use on steel beams and are fixed in place using clamps.

The anchorage device, type: ABS-Lock® T consists of two beam clamps, which are connected via a threaded rod (M16). At one end there is a folded plate (t = 8 mm) into which an eyelet (M16) is screwed. This is used to hold the personal fall protection equipment carried and is designed to withstand loads in all directions. The clamping range includes support flanges with a thickness of 8 mm to 16 mm and a width of 80 mm to 320 mm.

The variant, type: ABS-Lock® T-Max consists of a clamp fastening rail and two parallel clamps designed for flange thicknesses from 5 mm to 30 mm. The adjustable clamping range is 270 mm to 1370 mm. A ring eye is mounted on the clamp fastening rail, to which the user attaches the personal fall protection equipment they are wearing. The anchorage device is designed for loads along the rail and overhead.

Both versions are made of corrosion-resistant steel. The ABS-Lock® T also uses galvanised cast steel.

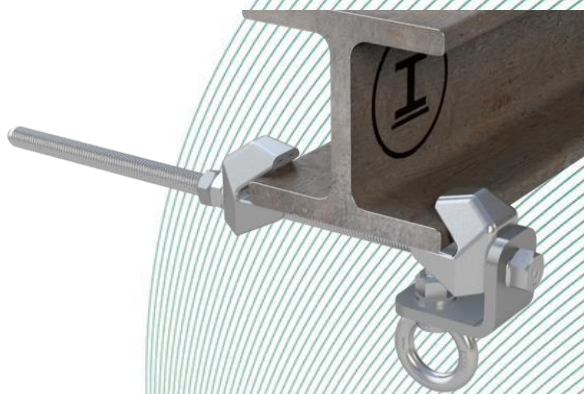


Fig. 1: Anchor device,
type: ABS-Lock® T

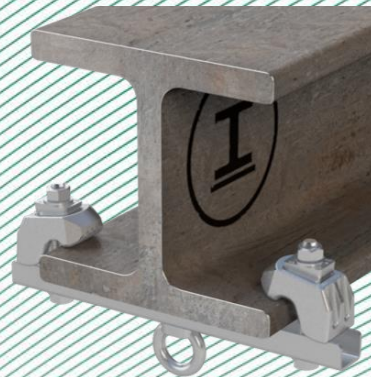


Fig. 2: Anchor device,
type: ABS-Lock® T-Max

- (17) Report

PB 25-090, 2025-05-28